

Flow-Max Stainless Steel Filter Housings

Single cartridge models for the most “user friendly” filtration possible!



Model "170"

Model "90"

Model "40"

Flow-Max® Commercial Quality Jumbo Cartridge Filter Housings In 316SS

MODEL NUMBER	MATERIAL	MAX. FLOW (GPM)	CARTRIDGE STYLE	NUMBER OF CARTRIDGES	PIPE SIZE	LID CLOSURE
FMJCH40	316SS	50	"40"	1	2" NPT	V-Band
FMJCH90	316SS	100	"90"	1	2" NPT	V-Band
FMJCH170	316SS	150	"170"	1	2" NPT	V-Band

NOTICE

Commercial quality jumbo cartridge housings are rated for pressures to 150psi (10 bar) and temperatures to 140°F with standard jumbo cartridges and 250°F using high temp cartridges. Pressure gauges included and installed on inlets and outlet.



User friendly Flow-Max jumbo cartridges are easy to install, easy to service and easy to replace!



Adjustable compression cap provides superior sealing for both ends of the jumbo cartridge.



Model FMJCH170

Flow-Max Stainless Cartridge Systems

Flow-Max Jumbo Cartridges


With cellulose-free synthetic and mesh media in a wide range of micron ratings.



Standard Synthetic Media



Flow-Max jumbo filter cartridge

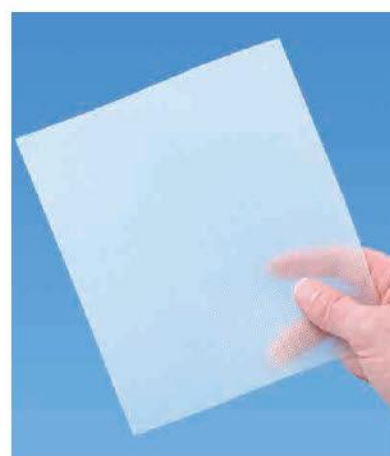

PP Mesh Media

Model 40

FILTER HOUSING MODEL NO.	MICRON RATING	MODEL NO. WITH SYNTHETIC MEDIA	MODEL NO. WITH MESH MEDIA	NUMBER PER CASE
40	1 Absolute	FMHC-40-1A	N. A.	1
	0.35	FMHC-40-0.35EZ	N. A.	1
	1	FMHC-40-1EZ	N. A.	1
	5	FMHC-40-5EZ	N. A.	1
	20	FMHC-40-20EZ	N. A.	1
	50	FMHC-40-50EZ	N. A.	1
	100	FMHC-40-100	N. A.	1
	150	N. A.	FMHC-40-150M	1

Model 90

FILTER HOUSING MODEL NO.	MICRON RATING	MODEL NO. WITH SYNTHETIC MEDIA	MODEL NO. WITH MESH MEDIA	NUMBER PER CASE
90	1 Absolute	FMHC-90-1A	N. A.	1
	0.35	FMHC-90-0.35EZ	N. A.	1
	1	FMHC-90-1EZ	N. A.	1
	5	FMHC-90-5EZ	N. A.	1
	20	FMHC-90-20EZ	N. A.	1
	50	FMHC-90-50EZ	N. A.	1
	100	FMHC-90-100	N. A.	1
	150	N. A.	FMHC-90-150M	1

Model 170

FILTER HOUSING MODEL NO.	MICRON RATING	MODEL NO. WITH SYNTHETIC MEDIA	MODEL NO. WITH MESH MEDIA	NUMBER PER CASE
170	1 Absolute	FMHC-170-1A	N. A.	1
	0.35	FMHC-170-0.35	N. A.	1
	1	FMHC-170-1EZ	N. A.	1
	5	FMHC-170-5EZ	N. A.	1
	20	FMHC-170-20EZ	N. A.	1
	50	FMHC-170-50EZ	N. A.	1
	100	FMHC-170-100EZ	N. A.	1
	150	N. A.	FMHC-170-150M	1

Maximum Flow Rates Per Cartridge (GPM)

MICRON RATING	JUMBO CARTRIDGE		
	40 MAX FLOW (GPM)	90 MAX FLOW (GPM)	170 MAX FLOW (GPM)
1 Absolute	20	40	80
0.35 Micron	25	50	100
1 Micron	30	60	120
5 Micron	50	100	150
20 Micron	50	100	150
50 Micron	50	100	150
100 Micron	50	100	150